Simulating Radio Frequency Propagation via Ray Tracing

Konstantin Shkurko
School of Computing
University of Utah

Thiago Ize
SCI Institute
University of Utah

Christiaan Gribble
Applied Technology Operation
SURVICE Engineering

Erik Brunvand
School of Computing
University of Utah

Lee A. Butler
U.S. Army Research Laboratory

Overview

Prediction of radio frequency (RF) energy propagation in the presence of complex outdoor terrain features—urban environments, for example—is of great interest when planning, optimizing and analyzing wireless networks. A tool for fast prediction could improve network coverage, provide estimates of signal strength throughout the environment, estimate time delay of multipath signals, and provide data for power allocation in the deployed transmitters. Such a tool is essential when planning networks that need to be set up quickly for temporary purposes.
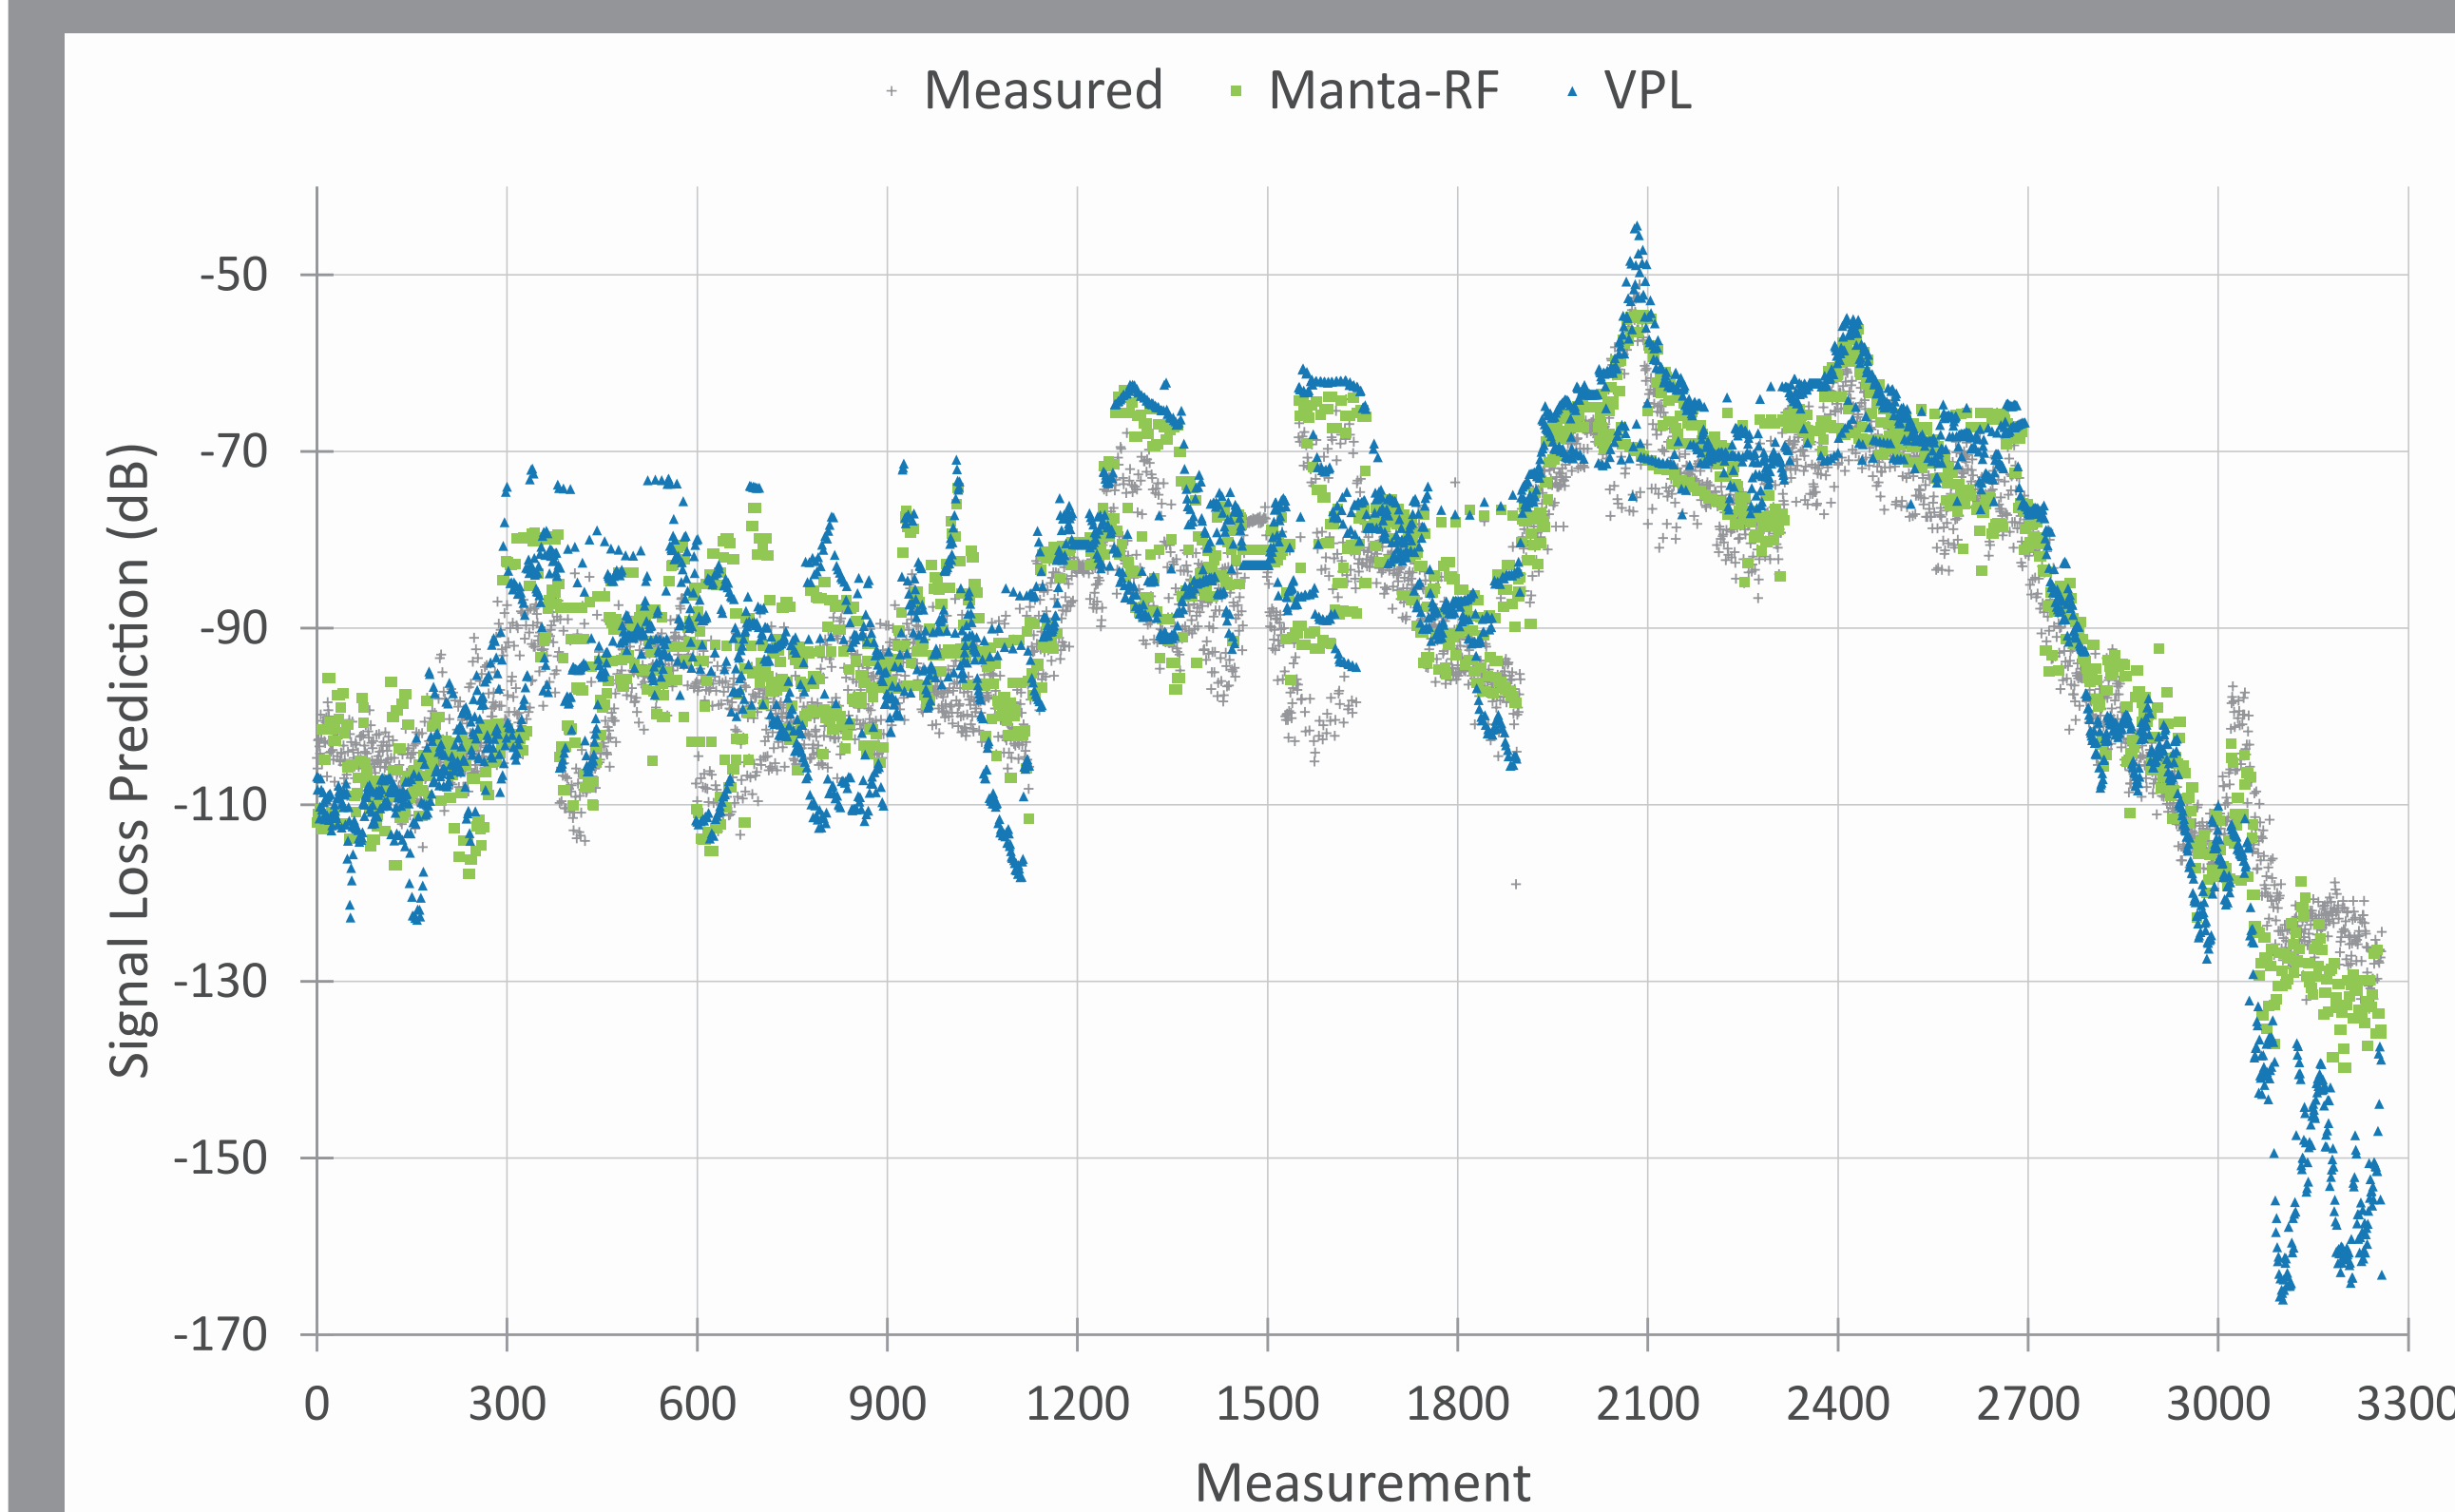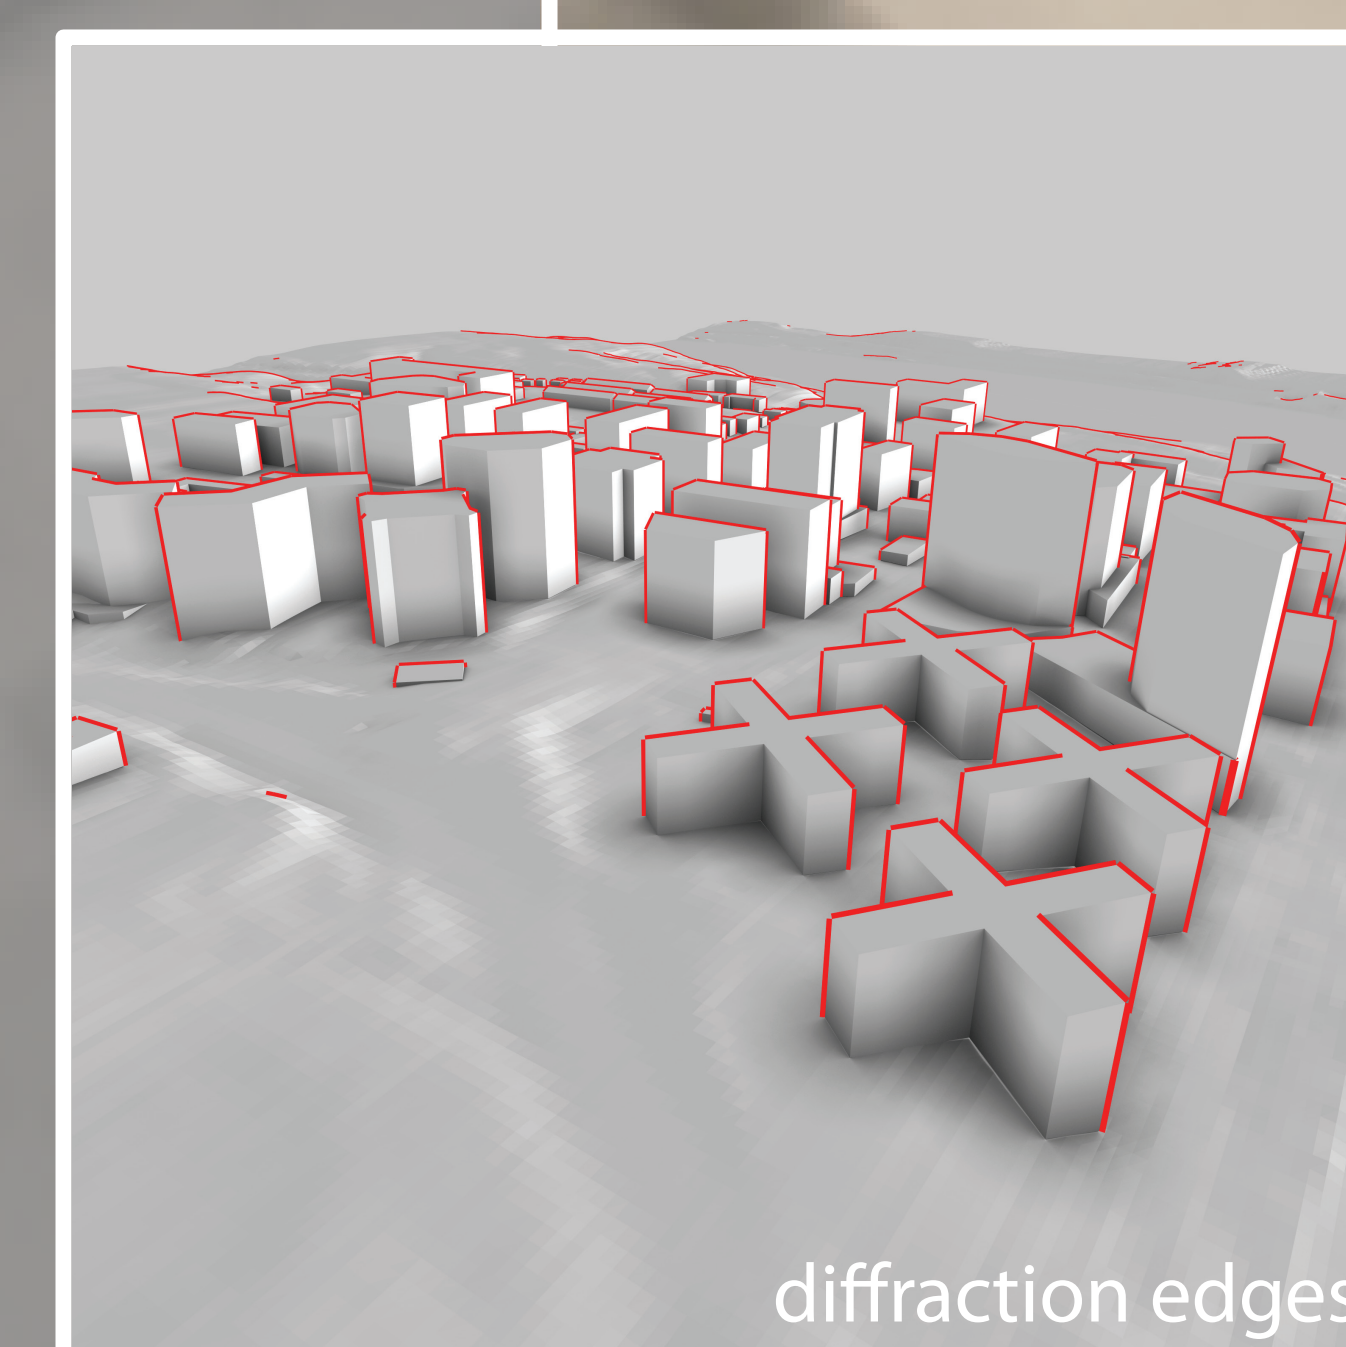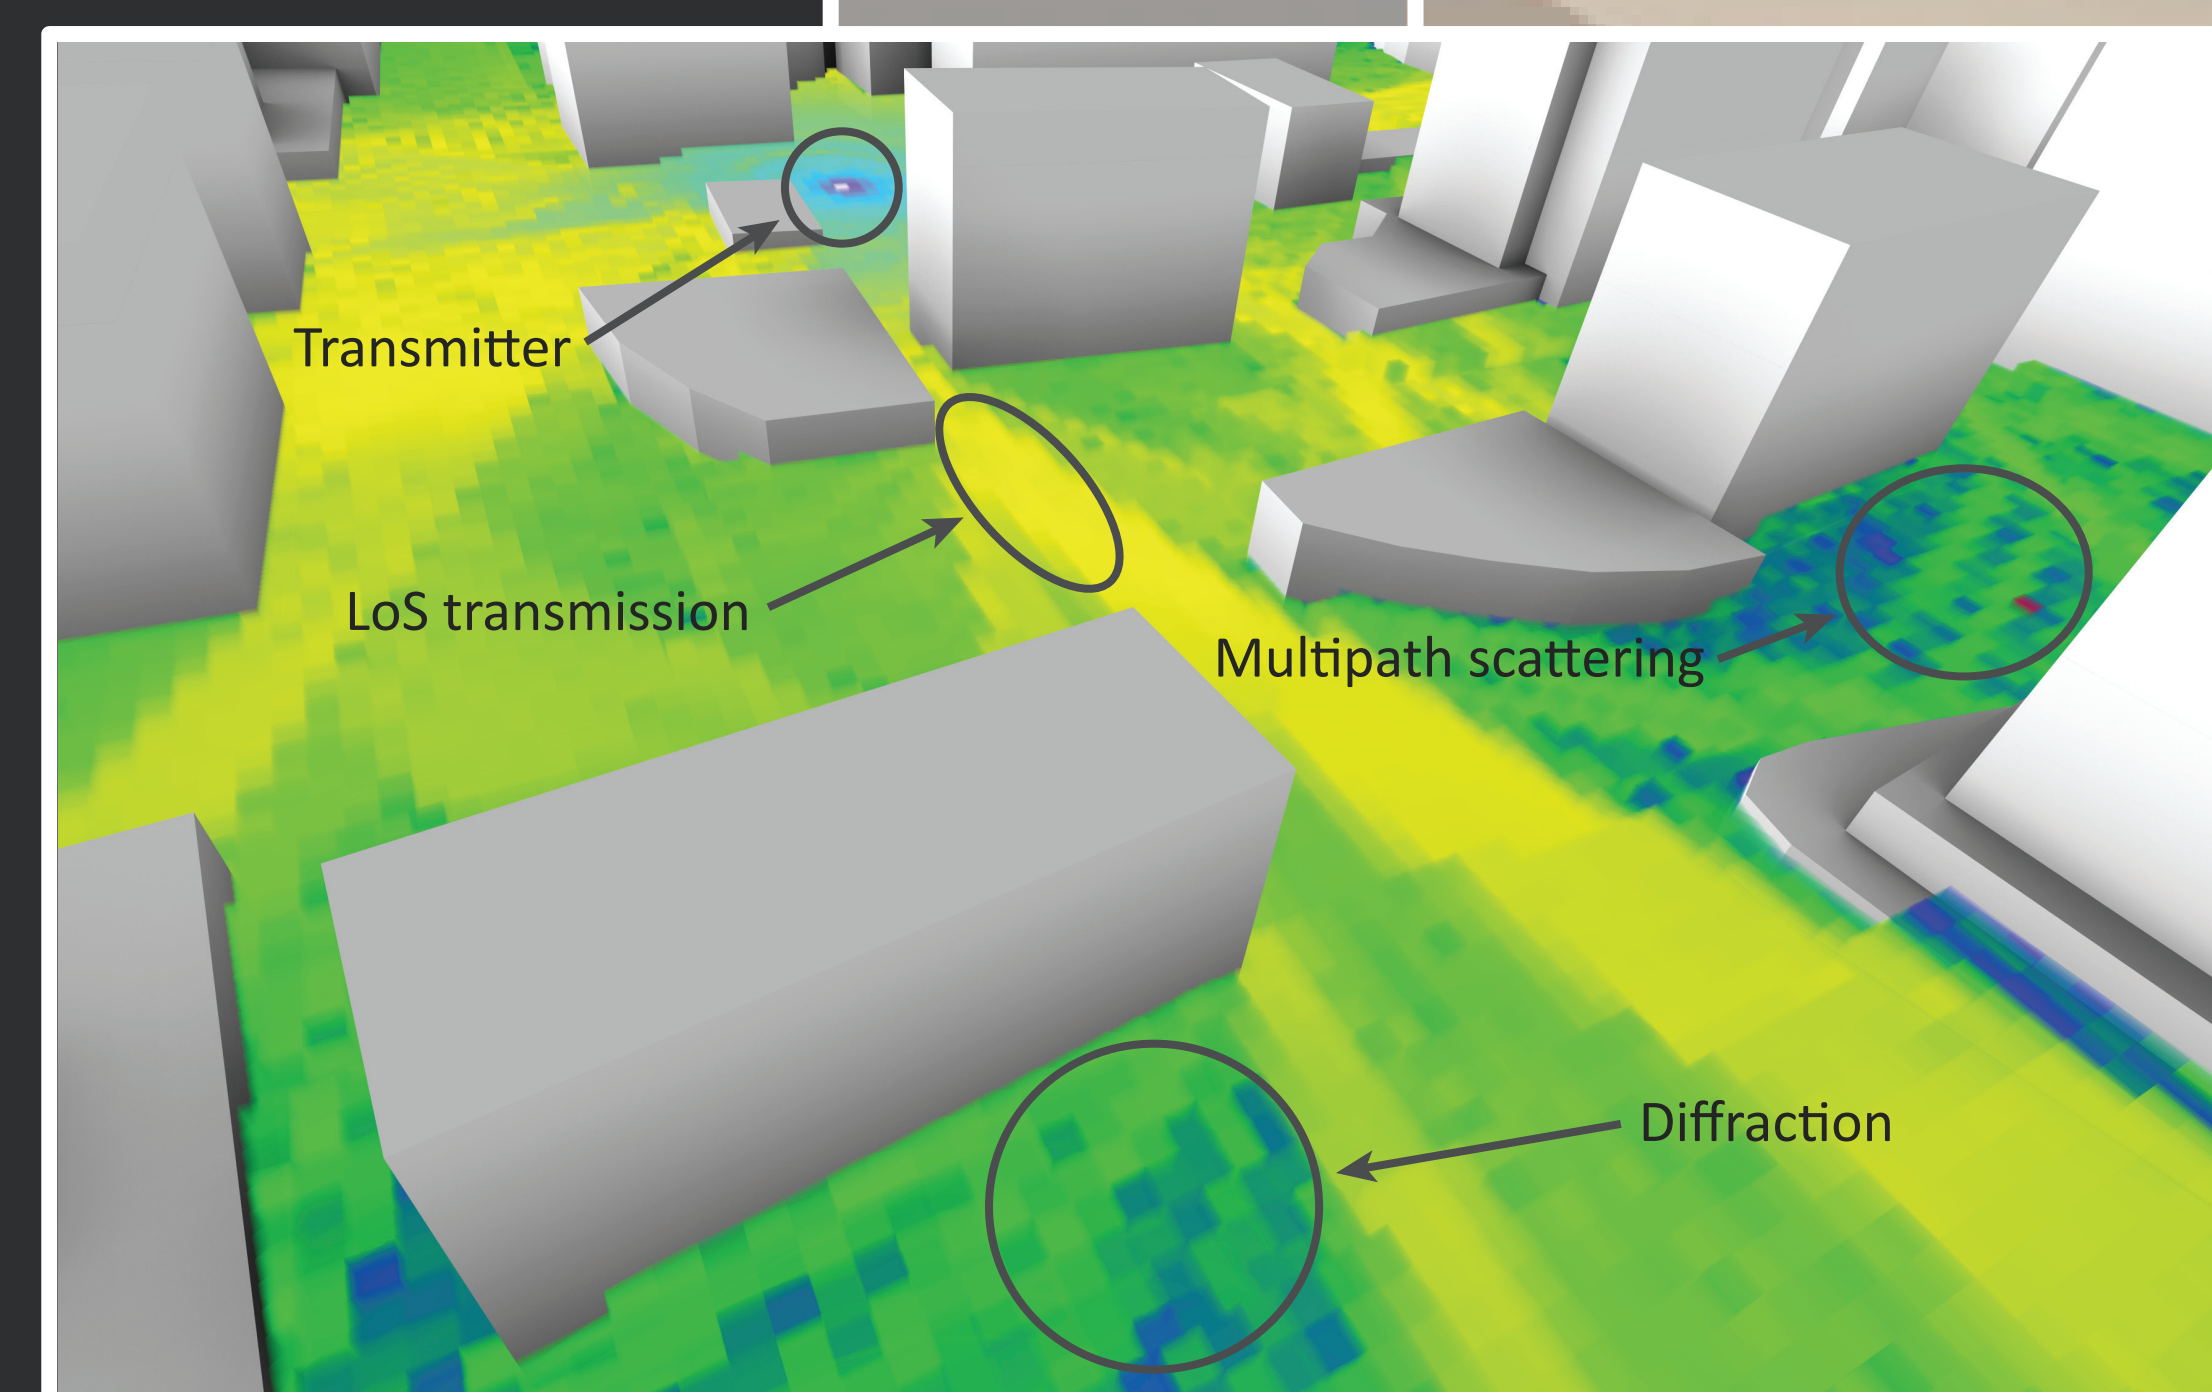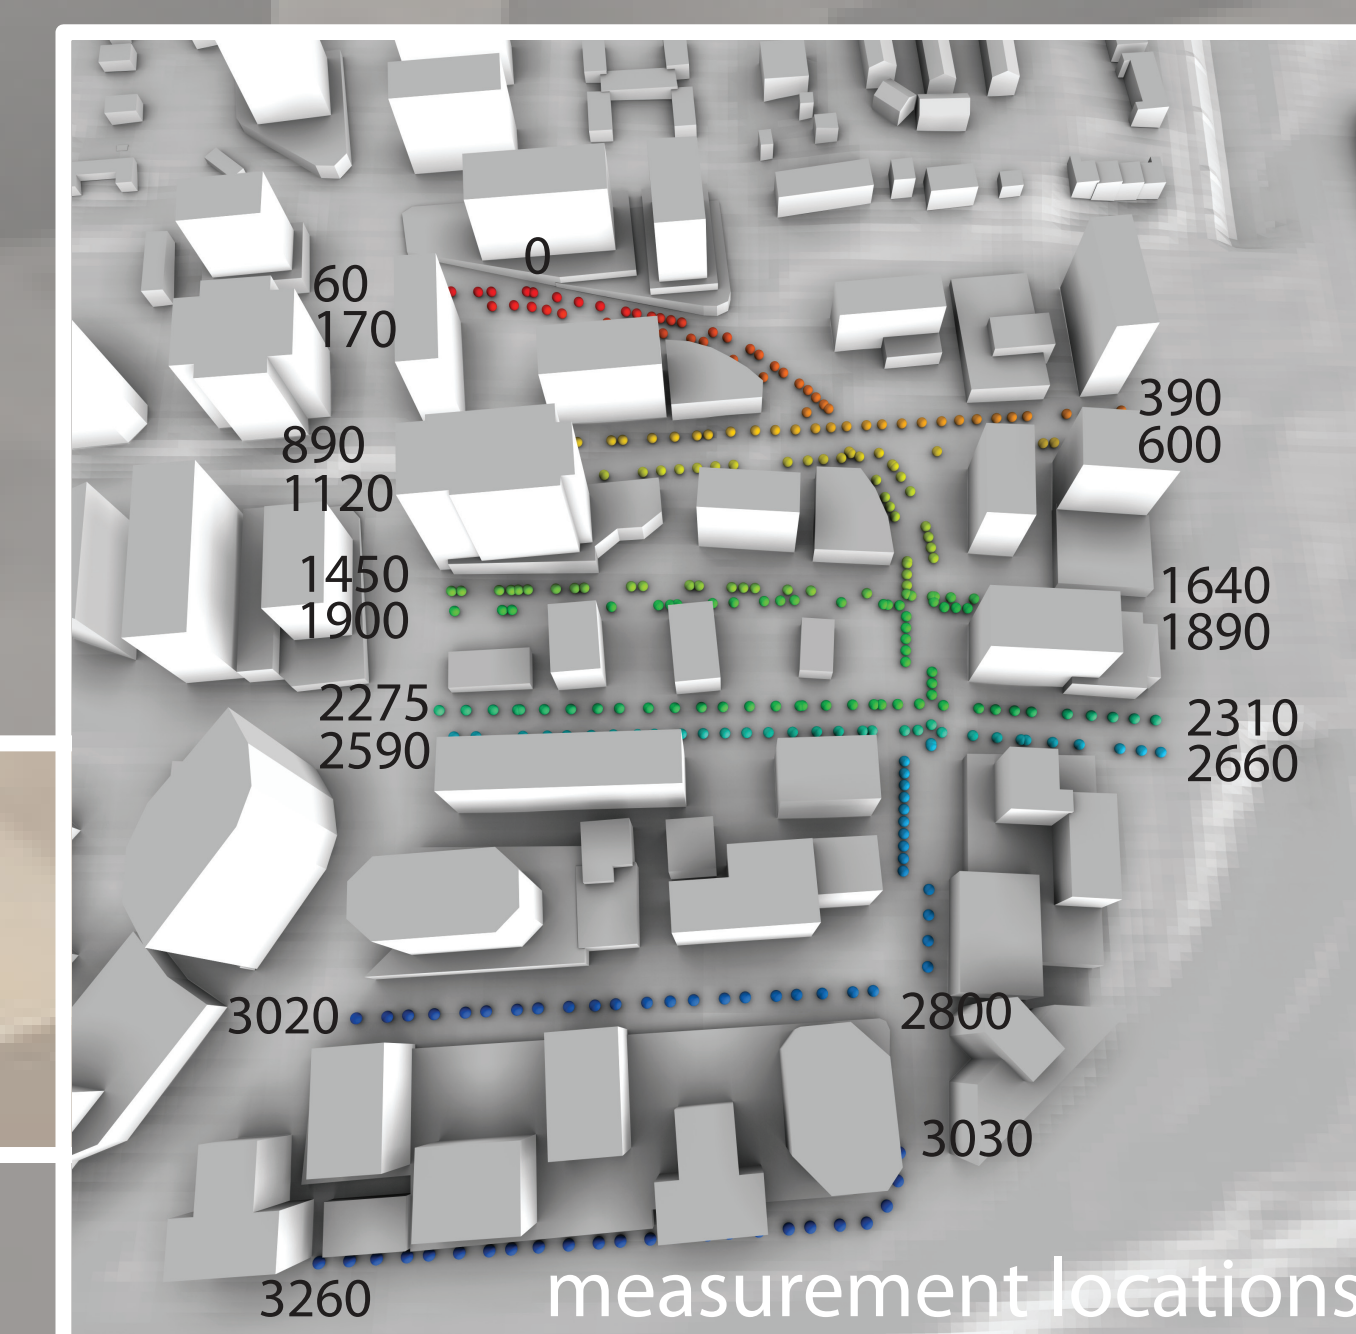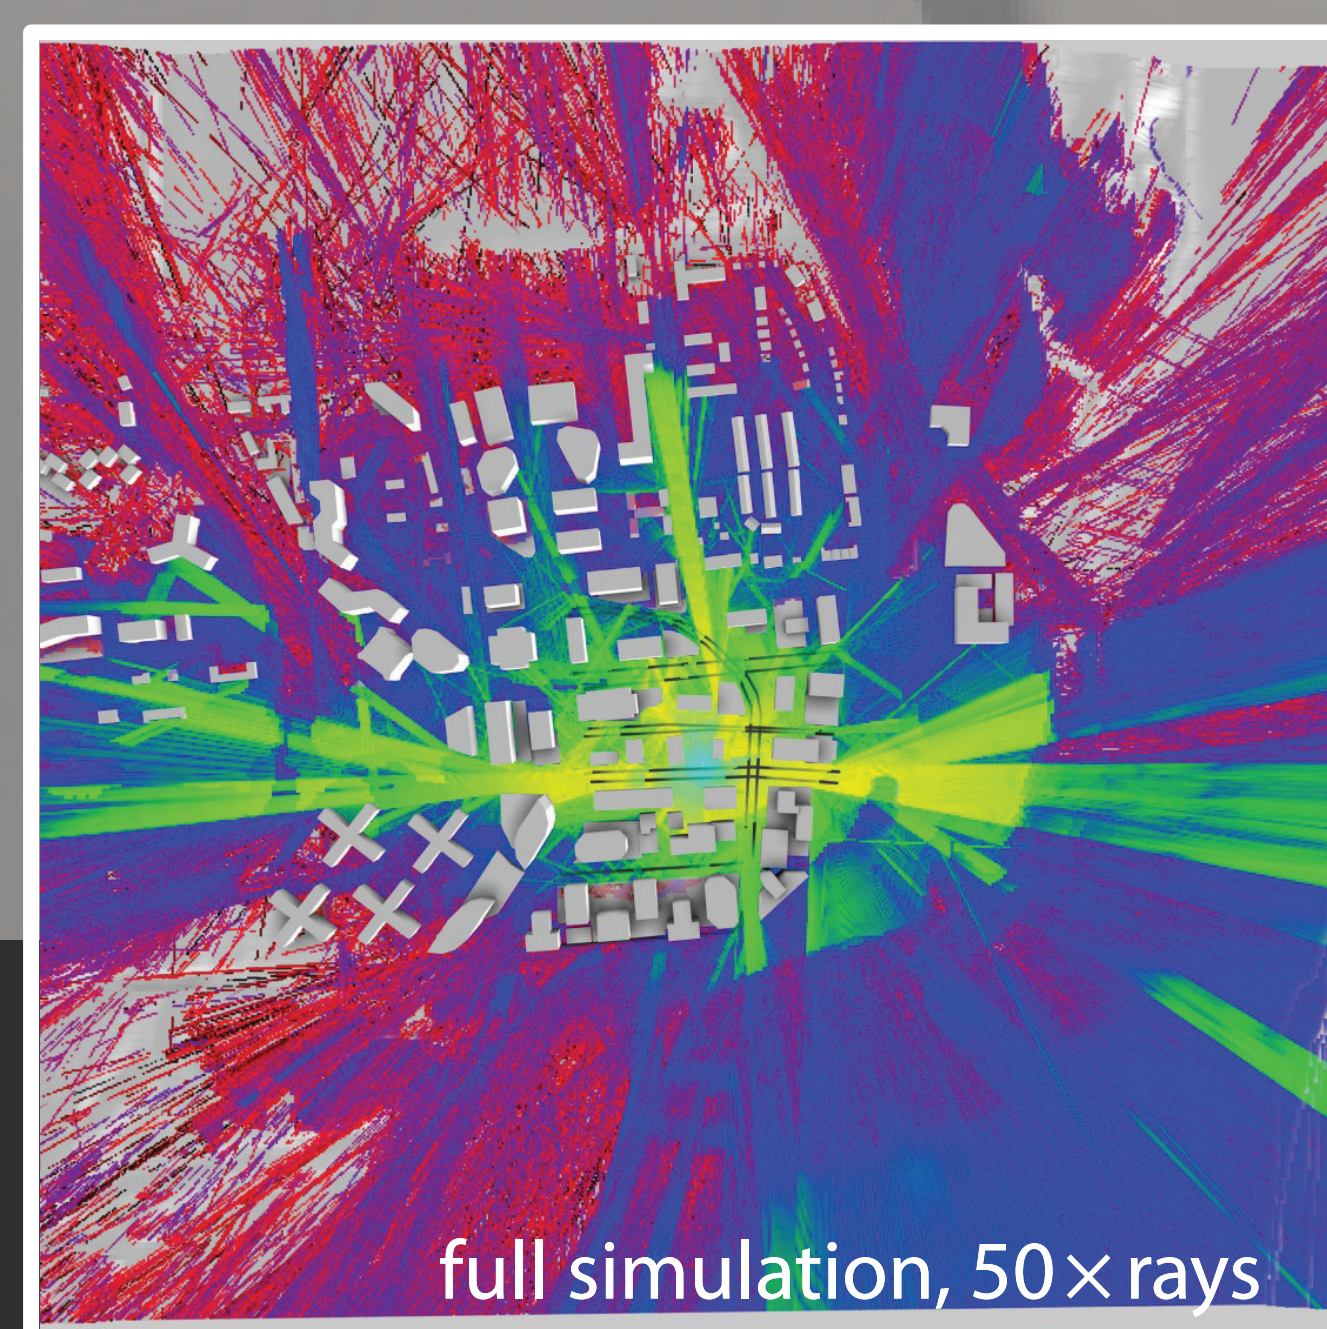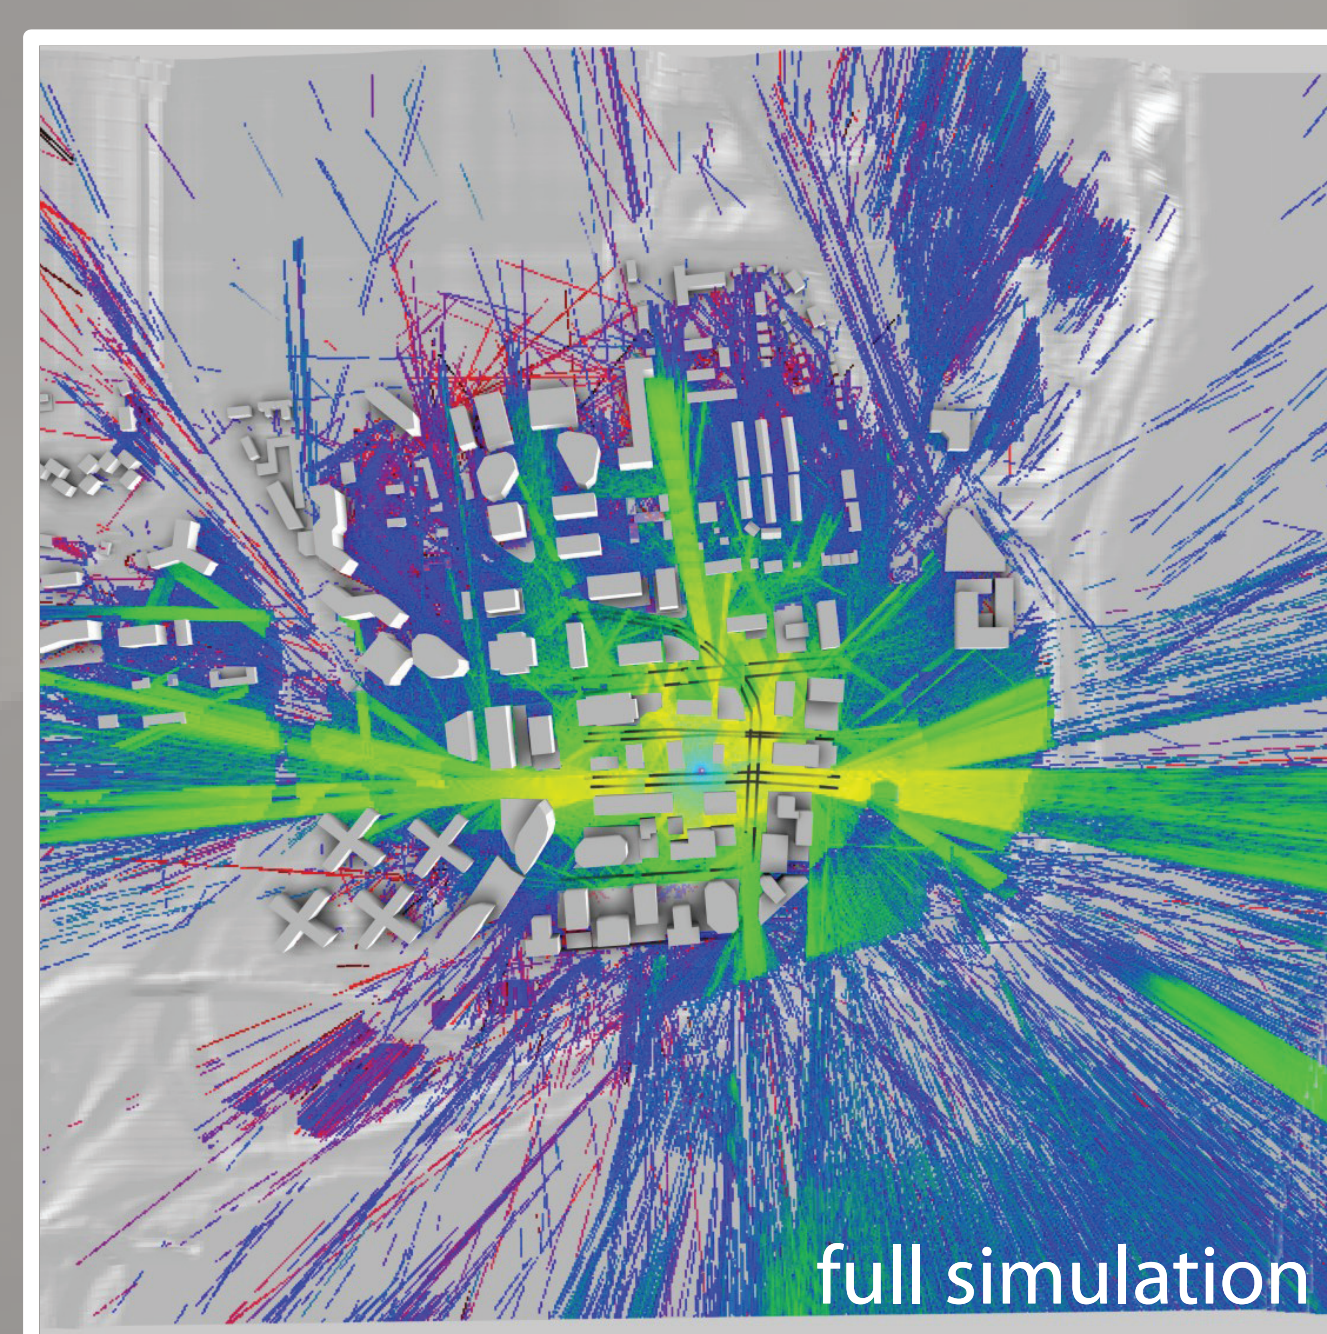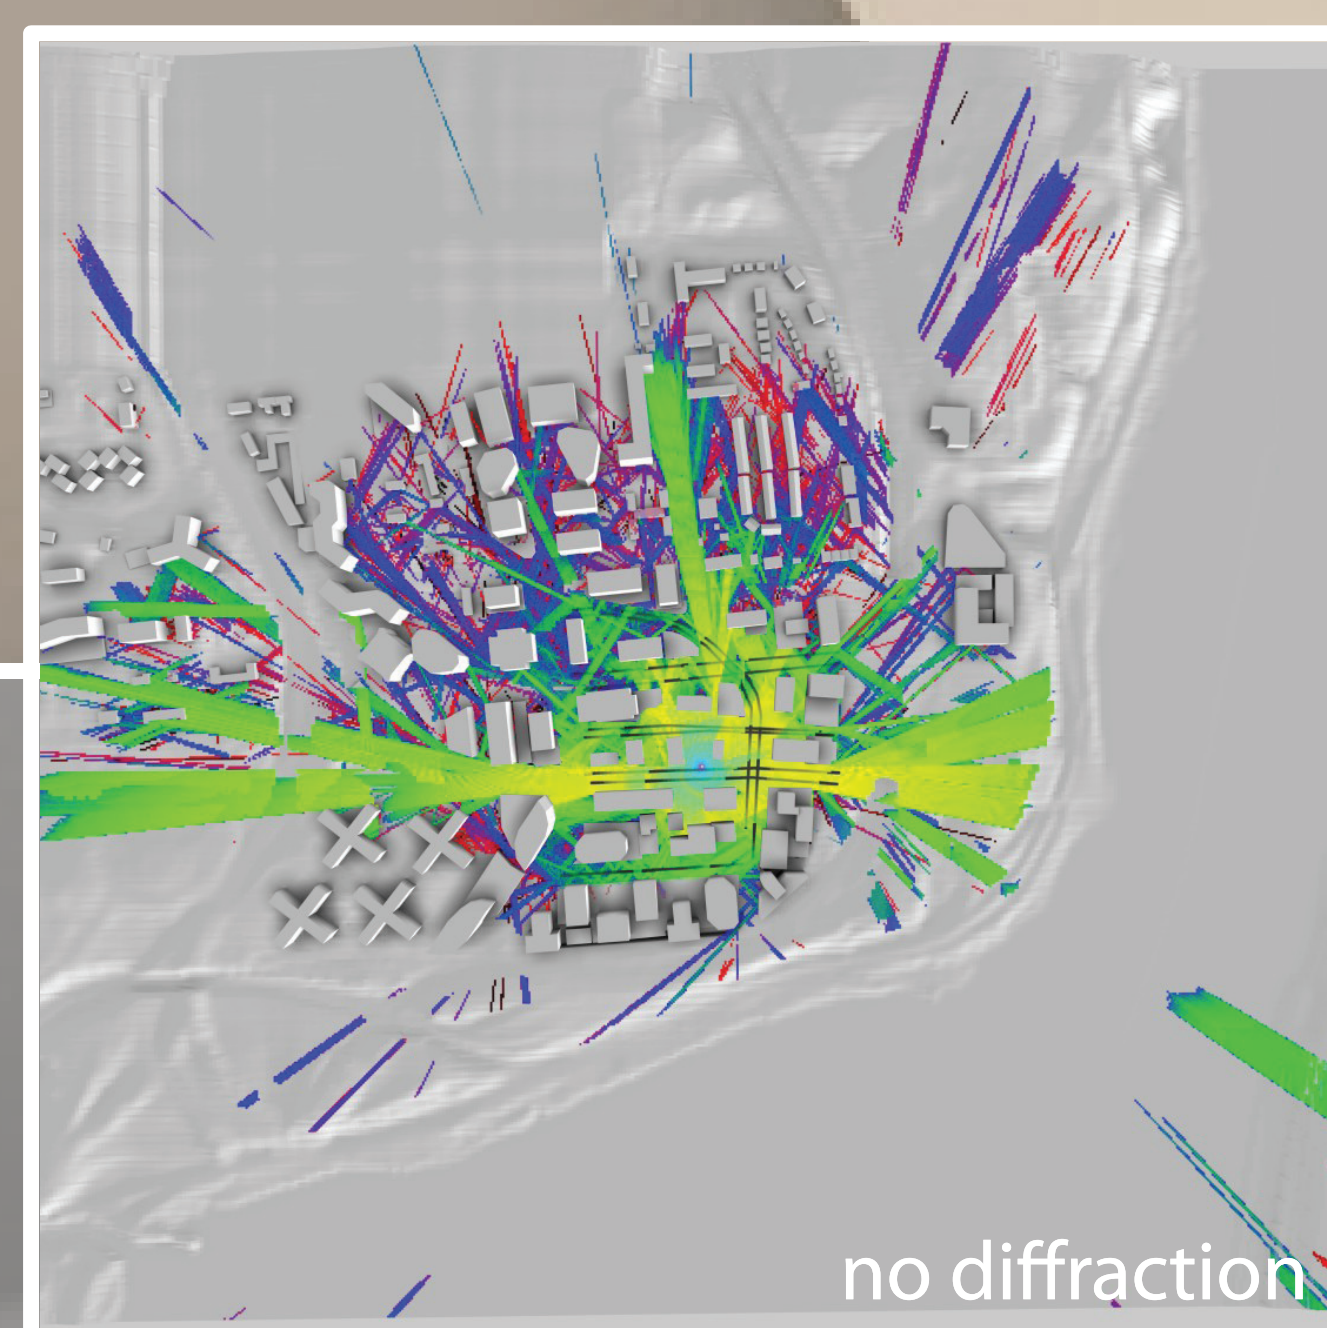
Ray tracing for RF simulation

Optical ray tracing simulates the propagation of visible light in complex 3D environments and also elegantly handles important effects such as direct line-of-sight, reflection, and diffraction. We observe that RF energy is also a form of electromagnetic energy, albeit at a very different frequency than light; thus, ray tracing exhibits potential for simulating physical phenomena in the RF domain. We thus build on optical ray tracing to simulate RF energy propagation in complex urban environments.

Specifically, we have created the Manta-RF system, which is based on the open source interactive ray tracing framework Manta [Bigler et al. 2006]. To enable RF prediction, we have made a number of enhancements:

- a technique for simulating and capturing RF energy information in each volume grid point,

- a technique for measuring the arrival time of energy at volume grid points in a manner that accounts for wave-based interference,

- an algorithm for finding all edges in the geometry that could cause diffraction, and

- a simple but reasonably accurate diffraction model for RF propagation.

Validation against several measured datasets, including Rosslyn, VA [Seong-Cheol et al. 1999] and Munich, Germany [Damosso 1998], shows that ray-based simulation offers a high fidelity approach for RF prediction. Importantly, a ray-based solution also offers high performance: simulations involving $O(10^8)$ rays complete in less than 10 minutes on a modern laptop. Moreover, these simulations scale gracefully: for a machine with more processors, either similar quality results are computed in less time or higher fidelity results are computed in similar time.

no diffraction

full simulation

full simulation, 50× rays

measurement locations

Transmitter

LoS transmission

Multipath scattering

Diffraction

diffraction edges

Comparison of signal loss predictions using Manta-RF and VPL [Liang & Bertoni 1997] against measured data from the Rosslyn, VA dataset (measurement locations shown at left).

Measured   Manta-RF   VPL

Signal Loss Prediction (dB)

Measurement

Next steps

We are actively migrating the Manta-RF implementation to the massively parallel computational environment provided by modern GPUs generally, and NVIDIA's CUDA architecture specifically. Ray tracing scales well with core count, so GPU computing is particularly well-suited to this task.

In addition to significantly higher performance, GPU ray tracing with CUDA will facilitate combined simulation and real-time visualization. By fusing these components into a single computational pipeline, GPU ray tracing will allow users to explore numerous what-if scenarios in the time normally required for a single simulation run. However, it also enables a fundamental shift in the analysis process: users can now interact with a visual representation of not just the results, but also of the mechanisms of computation as a simulation proceeds. This approach actively drives understanding—understanding that will allow analysts to direct and refine their simulations more quickly and effectively.

References

[Bigler et al. 2006] J. Bigler, A. Stephens, & S. G. Parker. Design for Parallel Interactive Ray Tracing Systems. In IEEE Symposium on Interactive Ray Tracing, 2006.

[Brunvand & Ize 2011] E. Brunvand & T. Ize. Radio Frequency (RF) Ray Trace Propagation Analysis; Final report. U.S. Army Research Office, 2011.

[Damosso 1998] E. Damosso, editor. COST Action 231: Digital mobile radio towards future generation systems; Final report. European Commission, 1998.

[Liang & Bertoni 1997] G. Liang & H. L. Bertoni. A new approach to 3D ray tracing for site specific propagation modeling. In IEEE Vehicular Technology Conference 1997.

[Seong-Cheol 1999] K. Seong-Cheol, J. B. J. Guarino, I. T. M. Willis, V. Erceg, S. J. Fortune, R. A. Valenzuela, L. W. Thomas, J. Ling, & J. Moore. Radio propagation measurements and prediction using three-dimensional ray tracing in urban environments at 908 MHz and 1.9 GHz. IEEE Transactions on Vehicular Technology, 48:931-946, 1999.

THE UNIVERSITY OF UTAH

SCI   www.sci.utah.edu

SURVICE

ARL